

ATTACHMENT NO: XI-C Capron Freezer

Potential Motion: Move to approve the Replacement of the Capron Freezer

Recommended action: Approve the motion

At the September Facilities Committee meeting, preliminary quotes for a freezer and freezer parts were presented. It is recommended that we purchase the freezer and refrigeration components from Norlake at a cost of \$9,027. The District will remove the old freezer and install the new freezer.

Walk in Freezer at Capron

Norlake	9,037.00
Central Restaurant Products	9,421.15
Superior Equipment	10,430.94



727 2nd Street
Hudson, Wisconsin 54016
800-955-5253
715-386-2323
715-386-6149 FAX

Quote No.
Date :
Page :

Quotation

NL1989958JC-C
09/19/2019
1 of 4

Customer
2701

Attention
Project
Item Number
Rep Name
Rep Number
Sales Specialist

Capron Elementary School
53 - Hanna-Young Associates
53
Kristine Anderson

\$ Net

(1) Nor-Lake FINELINE Walk-In Freezer
8' 0" long, 5' 0" wide, 7' 7" high.

This full size Nor-Lake walk-in contains 220 internal cubic feet to assure maximum storage capacity.
Compare to other quotes which may be nominal dimensions which can result in reduced storage space.

TOTAL WALK-IN PRICE

\$ 5350⁰⁰

(1) LASJ105RL4-#BYH Refrigeration system

Refrigeration is "sized" for holding product only; that is; our calculation is based on product entering at the same temperature as the desired temperature of this walk-in. If you feel that this is insufficient, please advise.

TOTAL REFRIGERATION PRICE

\$ 3270⁰⁰

(1) 100 To 125 Series - Optional Five Year Extended Compressor Warranty

(1) 18 Month Labor/Service Warranty

(1) Standard 15 year Walk-in Panel Warranty

(1) Standard 1 year Replacement Parts Warranty

TOTAL WARRANTY PRICE

\$ 107⁰⁰
\$ 8727⁰⁰

FREIGHT

INSTALLATION

GRAND TOTAL QUOTATION PRICE

Freight

\$ 300⁰⁰

Notes / Clarifications:

Approximate Total Shipping Weight (lbs) 1,175

Nor-Lake manufactures with environmentally friendly, CFC free, HFC 245fa polyurethane foam insulation.

Prices protected from increase for 60 days from date of quotation. Prices void if purchase order, signed quote or print, and release for production are received later than 60 days from date of quotation. All shipments FOB Hudson, WI. Based on the ship to address of this product, state sales tax maybe applicable. If applicable, sales tax will be added to the Nor-Lake invoice.

Acceptance of an order based on this quotation is subject to credit approval.

Please reference this Quotation Number on all correspondence.



727 2nd Street
Hudson, Wisconsin 54016
800-955-5253
715-386-2323
715-386-6149 FAX

Quotation

Quote No.
Date :
Page :

NL1989958JC-C
09/19/2019
2 of 4

Customer
2701

Attention	
Project	Capron Elementary School
Item Number	
Rep Name	53 - Hanna-Young Associates
Rep Number	53
Sales Specialist	Kristine Anderson

Approved by: _____

California State Contractor License #940932.


(1) Nor-Lake FINELINE Walk-In Freezer
8' 0" long, 5' 0" wide, 7' 7" high.

Finishes:

26 Gauge Corrosion Resistant Stucco Embossed Coated Steel - Interior wall, Exterior wall, Interior ceiling

26 Gauge Smooth Galvanized - Ceiling topside, Floor bottomsides

.100 Smooth Aluminum - Interior floor

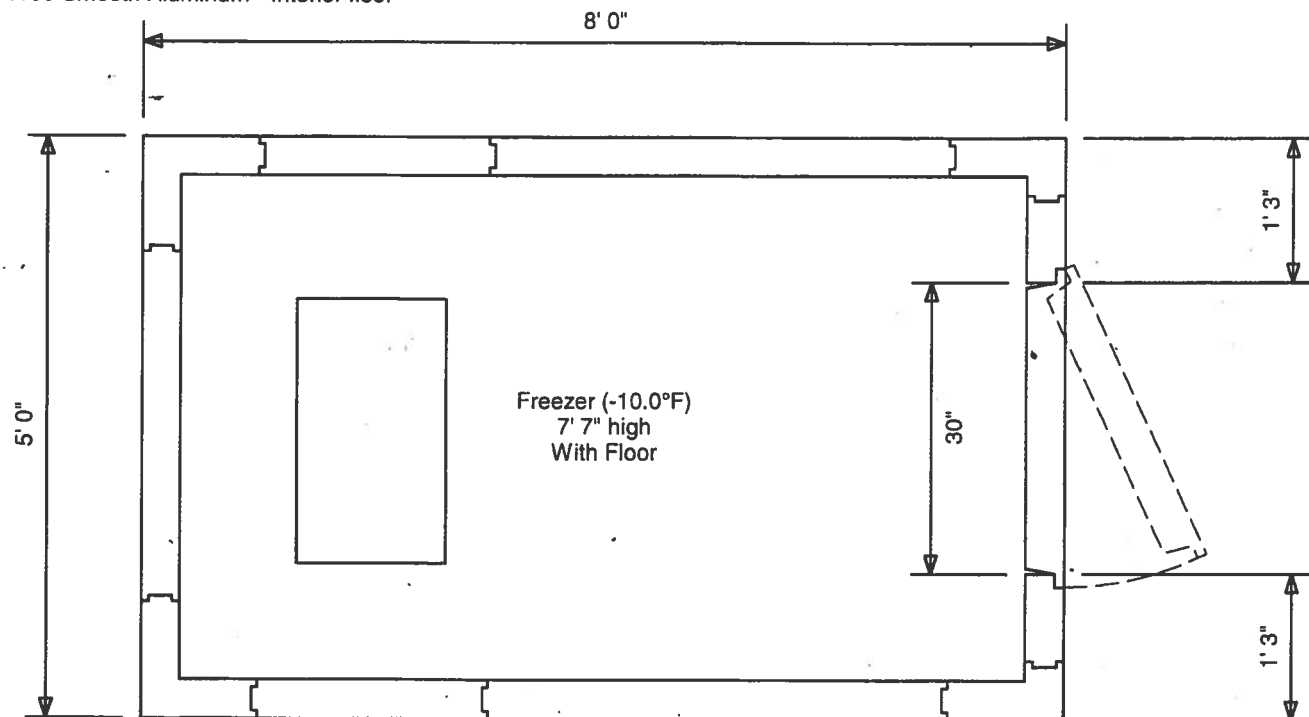



727 2nd Street
Hudson, Wisconsin 54016
800-955-5253
715-386-2323
715-386-6149 FAX

Quotation

Quote No. NL1989958JC-C
Date : 09/19/2019
Page : 3 of 4

Customer
2701

Attention	
Project	Capron Elementary School
Item Number	
Rep Name	53 - Hanna-Young Associates
Rep Number	53
Sales Specialist	Kristine Anderson

(1) 30" X 78" Walk-In Door right-hand swing

Includes door closer, cam lift hinges (one spring loaded on 36" wide and smaller doors), NL9800 deadbolt key/padlock handle with inside release, magnetic gasket, heater wire, double sweep gasket, LED vapor proof light, Heated Air Vent (standard on all freezer compartments) and NL508 combination digital thermometer and switch w/pilot light.

(1) LASJ105RL4-#BYH -10° F Operation, Low Temperature, Air Cooled, R-449A, Defrost Timer, Remote Fast-Trak cULus Refrigeration System, Pre-Assembled, Pre-Piped, With Hand Valves For Field Piping, Flip Up All Weather Hood And -20 Degree Ambient Controls, Visit NorLake.com for Spec Sheet and Electrical Data (system capacity 4217 BTU's/hour at 100.0°F ambient temperature.)

Calculated load for Freezer (-10.0°F) is 2453 BTU's/hour calculated from 90 °F ambient temperature, 0' elevation, 70 °F floor temperature, 5.77 minutes open door time per 24 hrs for(1) 30.00" X 78.00" walk-indoor opening into 90.00 °F ambient, 1.5 Watts per square foot lighting operating 10 hours per day, 0.02 occupants working 10 hours per day. All calculations are based on data supplied by ASHRAE publications.

(1) 100 To 125 Series - Optional Five Year Extended Compressor Warranty

(1) 18 Month Labor/Service Warranty

Refrigeration is "sized" for holding product only; that is; our calculation is based on product entering at the same temperature as the desired temperature of this walk-in. If you feel that this is insufficient, please advise.

Construction Approvals: NSF Approved, cULus and CSA Electrical, UL Flame Spread-25 and ULC Flame Spread-50 in accordance with ASTM E-84. To comply with the US Energy Independence & Security Act of 2007, all walk-in doors opening into the ambient (indoors or outdoors) are required to have a method for minimizing infiltration when the doors are open. All Nor-Lake walk-in doors will include a spring hinge to comply with this standard by 1-1-09, however; to further minimize infiltration, Nor-Lake recommends the use of a strip curtain or strip door for all exterior doors. NOTE: Indoor walk-in(s) must be in an environmentally controlled space. Relative Humidity should be kept between 30%-60%, maintaining a Dew Point of 50° F or less.

Quotation is subject to change upon receipt of detailed specifications and/or refrigeration load information. Refrigeration sizing is based on maximum line runs of 100 feet per system. NOTE: Walk-Ins sold into the state of California may require structural engineered drawings for seismic review. If required, Nor-Lake can provide the required drawings and structural support. Please contact Nor-Lake for lead time and pricing to meet this requirement. Local Codes: Walk-Ins may need engineered drawings or special construction to meet local code approvals for rain, wind, seismic, and snow load approvals. If required, please contact Nor-Lake for lead time and pricing to meet these requirements.

Verify all dimensions.

FREEZER System

Refrigeration Specifications

LASJ105RL4

Compressor

Air cooled Condensing Unit

Rack Size


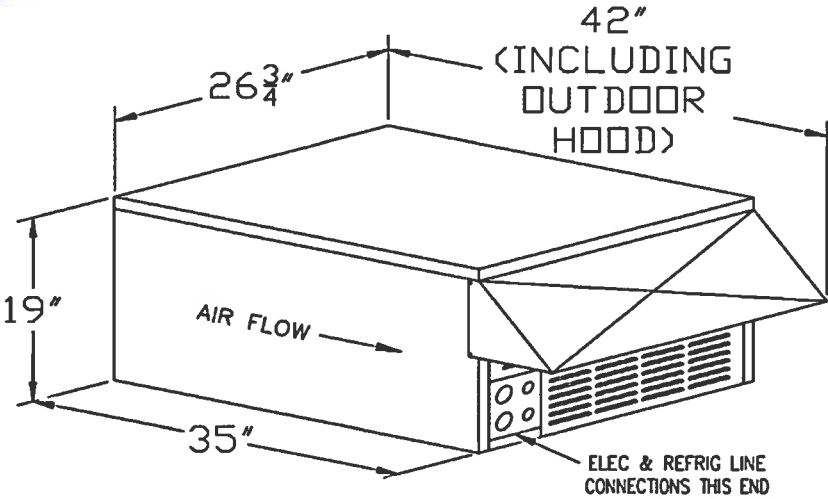
Refrigerant

Scroll

208-230/60/1

A

R449A


Condensing unit Total Amps.

20

Model #	HP	Electrical Data		BTU Capacity		Connection sizes		Weight (lbs)
		MCA	MOP	Temp Setpoint	-10° @ 100° Ambient	Liquid (in)	Suction (in)	
LASJ105RL4	1	12.38	20	4,217		3/8	7/8	161

Evaporator Unit Cooler

230/60/1

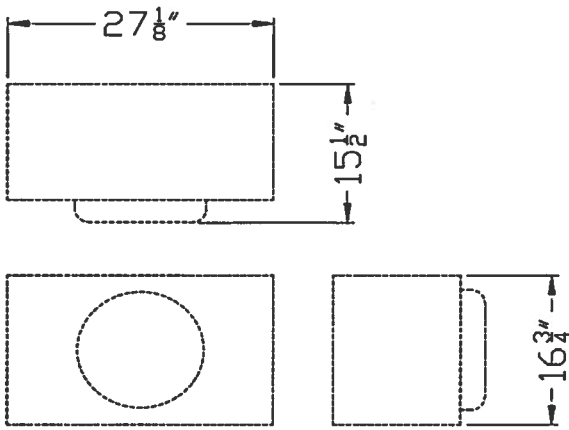

Evaporator Specifications

Model #	Fan Qty	CFM	Electrical Data (1)			Connection sizes			Weight (lbs)
			MCA	MOP	Elec Defrost Amps	Liquid(in)	Suction(in)	Drain(in)	
WL6E049DDAS	1	775	6.6	20	4.9	3/8	5/8	3/4	47

Model#

LASJ105RL4

Heat of Rejection btu/hr

8286

Cond part #

LASJ105RL4

Evap part #

WL6E049DDAS

Nominal voltage

208-230/60/1

Nominal voltage

230/60/1

MCA

12.38

MCA

6.625

MOP

20

MOP

20

Weight

161

Weight

47

NORLAKE

Rev 3/26/18



7750 Georgetown Rd • Indianapolis, IN 46268
Phone 800-222-5107 • Fax 800-882-0086

Quotation

Quotation# 11760128
Date 09/23/19
Customer# 088914
Page 1 of 1

North Boone CUSD #200
6248 N Boone Schl Rd
Attn: Accounts Payable
Poplar Grove, IL 61065

Ship To:
CAPRON ELEMENTRY SCHOOL
200 N WOOSTER ST
CAPRON, IL 61012

Remit Payment To: **PO Box 78070 Indianapolis, IN 46278-0070**

Quote Date	Quote Expires	Payment Terms	Customer PO	Contact	
09/20/19	11/04/19	GOVT Net 15 Days		Jim Nolan	
Product Consultant		Ship Via	Freight Terms		
Wil Andersen ext 8389		FEDEX GRD 3RD PTY #127540322	FOB	ORIGIN/PREPAID AND ADD	
Item	Product/Description	Quantity	Price	U/M	Extension
1	W185-NL1990141KLB NORLAKE 8'x5'x7'7"H FREEZER	1	8993.74	EA	8993.74
2	#_WWW.CENTRALRESTAURANT.COM_# SHOP ONLINE 24HRS PER DAY WE'RE ALWAYS OPEN! ** Building Relationships...One Order at a Time! **	1	0.00	EA	0.00
Merchandise	Handling	Misc. Charge	Tax	Freight	Quote Total
8,993.74	0.00	0.00	0.00	427.41	9,421.15

Accepted By (Printed): _____ Signature _____ Date: _____

By signing above you are agreeing all product and totals are accurate. If purchase is to be made via credit card, signature by cardholder is required indicating authorization to charge card and process order. All prices above are in US dollars. All payments to Central are required to be made in US dollars. **** Upon Receipt of your Merchandise **** Please inspect your delivery carefully. In the unfortunate event that something is damaged or has to be returned, please call your product consultant. Please save all shipping cartons and packaging. Claims must be reported within 5 days of receiving your delivery. All returns are subject to inspection before a credit is issued and may be assessed a restocking charge. Please return defective items promptly to avoid being charged for the replacement item. Custom manufactured, special orders and used items are not returnable.

*** Central is OPEN until 8:00 pm (Eastern Time) ***

Kelly Holsker

From: Nolen, Jim
Sent: Monday, September 23, 2019 3:08 PM
To: Kelly Holsker
Subject: Fwd: Central Restaurant Products Quotation - 11760128
Attachments: 18894_51787_QOE11760128.pdf

----- Forwarded message -----

From: Wil Andersen <wila@centralrestaurant.com>
Date: Mon, Sep 23, 2019 at 1:26 PM
Subject: RE: Central Restaurant Products Quotation - 11760128
To: Wil Andersen <wila@centralrestaurant.com>, jnolen@nbcusd.org <jnolen@nbcusd.org>

California State Contractor License #940932.


(1) Nor-Lake FINELINE Walk-In Freezer
8' 0" long, 5' 0" wide, 7' 7" high.

Finishes:

26 Gauge Corrosion Resistant Stucco Embossed Coated Steel - Interior wall, Exterior wall, Interior ceiling

26 Gauge Smooth Galvanized - Ceiling topside, Floor ~~bottomside~~

.100 Smooth ~~Aluminum~~ - Interior floor

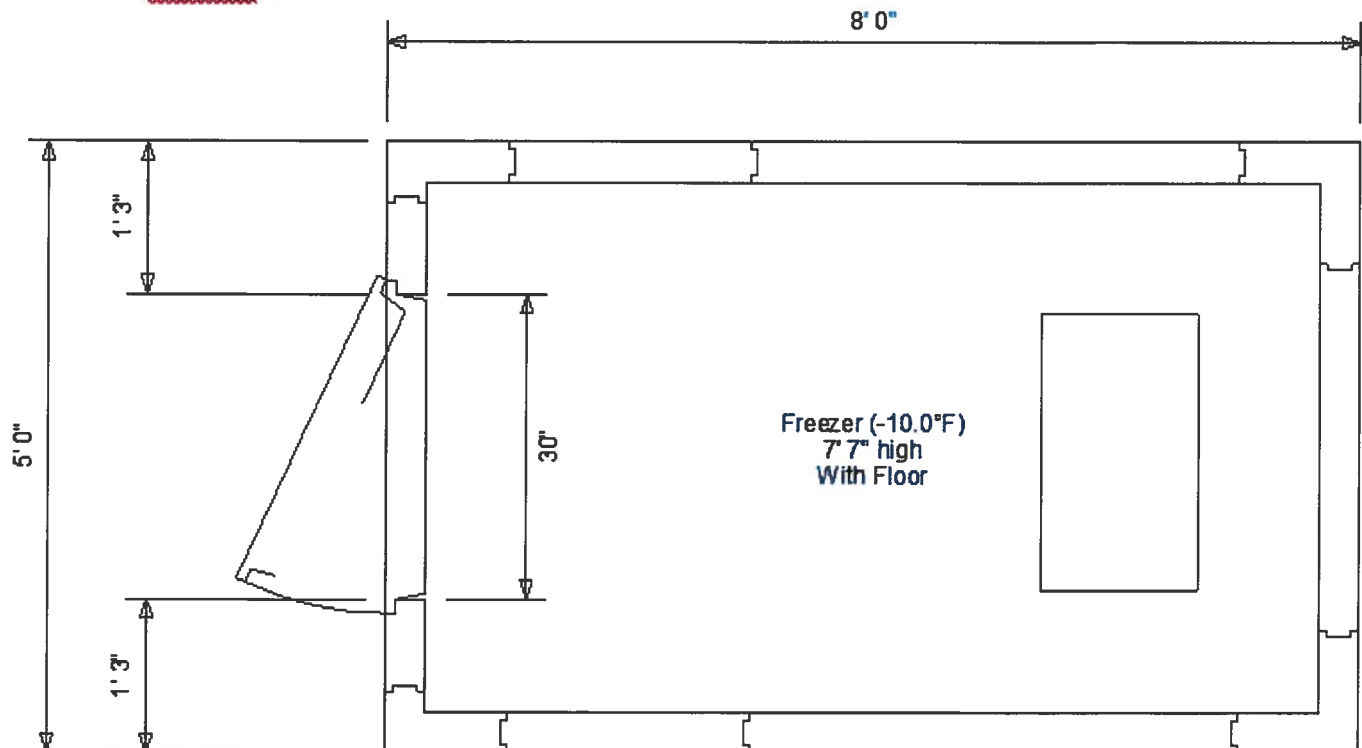

(1) 30" X 78" Walk-In Door left-hand swing

Includes door closer, cam lift hinges (one spring loaded on 36" wide and smaller doors), NL9800 deadbolt key/padlock handle with inside release, magnetic gasket, heater wire, double sweep gasket, LED vapor proof light, Heated Air Vent (standard on all freezer compartments) and NL508 combination digital thermometer and switch w/pilot light.

(1) LASJ105RL4-#BYH -10° F Operation, Low Temperature, Air Cooled, R-449A, Defrost Timer, Remote Fast-Trak ~~cULus~~ Refrigeration System, Pre-Assembled, Pre-Piped, With Hand Valves For Field Piping, Flip Up All Weather Hood And -20 Degree Ambient Controls, Visit NorLake.com for Spec Sheet and Electrical Data (system capacity 4217 BTU's/hour at 100.0°F ambient temperature.)

Calculated load for Freezer (-10.0°F) is 3569 BTU's/hour calculated from 90 °F ambient temperature, 0' elevation, 70 °F floor temperature, 13.85 minutes open door time per 24 hrs for (1) 30.00" X 78.00" walk-indoor opening into 90.00 °F ambient, 1.5 Watts per square foot lighting operating 8 hours per day, 0.02 occupants working 8 hours per day. All calculations are based on data supplied by ASHRAE publications.

(1) 100 To 125 Series - Optional Five Year Extended Compressor Warranty

(1) 18 Month ~~Labor~~ Service Warranty

Refrigeration is "sized" for holding product only; that is; our calculation is based on product entering at the same temperature as the desired temperature of this walk-in. If you feel that this is insufficient, please advise.

Construction Approvals: NSF Approved, ~~cULus~~ and CSA Electrical, UL Flame Spread-25 and ULC Flame Spread-50 in accordance with ASTM E-84. To comply with the US Energy Independence & Security Act of 2007, all walk-in doors opening into the ambient (indoors or outdoors) are required to have a method for minimizing infiltration when the doors are open. All Nor-Lake walk-in doors will include a spring hinge to comply with this standard by 1-1-09, however, to further minimize infiltration, Nor-Lake recommends the use of a strip curtain or strip door for all exterior doors. NOTE: Indoor walk-in(s) must be in an environmentally controlled space. Relative Humidity should be kept between 30%-60%, maintaining a Dew Point of 50° F or less.

Wil Andersen

Product Consultant

Office: 317-238-8389 • Fax: 317-238-8789

wila@centralrestaurant.com



Central
RESTAURANT PRODUCTS



From: wila@centralrestaurant.com <wila@centralrestaurant.com>

Sent: Monday, September 23, 2019 2:23 PM

SUPERIOR

EQUIPMENT & SUPPLY



Shop Where The Chefs Shop!


09/23/2019

CAPRON_E

Quote

Project: Capron Elementary school
Jim Nolen
200 N Wooster Street
Capron, IL 61012

From: Mike Mahmood
Superior Equipment and Supply Inc
4550 South Brust Ave
St. Francis, WI 53235
414-671-1200 x1010

Item	Qty	Description	Sell	Sell Total
1	1 ea	WALK IN MODULAR, BOX ONLY (WITH REFRIGERATION SELECTION) Nor-Lake Fast-Trak Indoor Walk-In, 5' x 8' x 7'-7" H, smooth aluminum interior floor, 26 gauge embossed coated steel interior & exterior finish, self-closing door, locking deadbolt handle Dimensions 91(h) x 72(w) x 84(d)	\$5,435.66	\$5,435.66
				
	1 ea	15 year original equipment panel warranty		
	1 ea	Fast-Trak™ Split-Pak™ Indoor/Outdoor Remote Refrigeration System, -10°F Freezer, 1-1/2 hp welded Scroll condensing unit, low profile ceiling mounted coil, R-449A refrigerant, (field pipe & charge) 208-230v/60/1-ph	\$4,446.53	\$4,446.53
	1 ea	18 Month Labor/Service and original equipment parts warranty		
	1 ea	5 Yr compressor warranty (net)	\$163.75	\$163.75
	1 ea	Door size 30" x 78"		
	1 ea	Door hinge to be specified later		
	1 ea	Interior Ramp, 30"	\$363.38	<Optional>
Class 150		Weight: 1459 lbs total		
Extended Total:				\$10,045.94
Merchandise				\$10,045.94
Freight				\$385.00
Subtotal				\$10,430.94
Total				\$10,430.94

Installation is not included in this quote.

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: \$10,430.94